


imperial

Candia
CERAMICHE

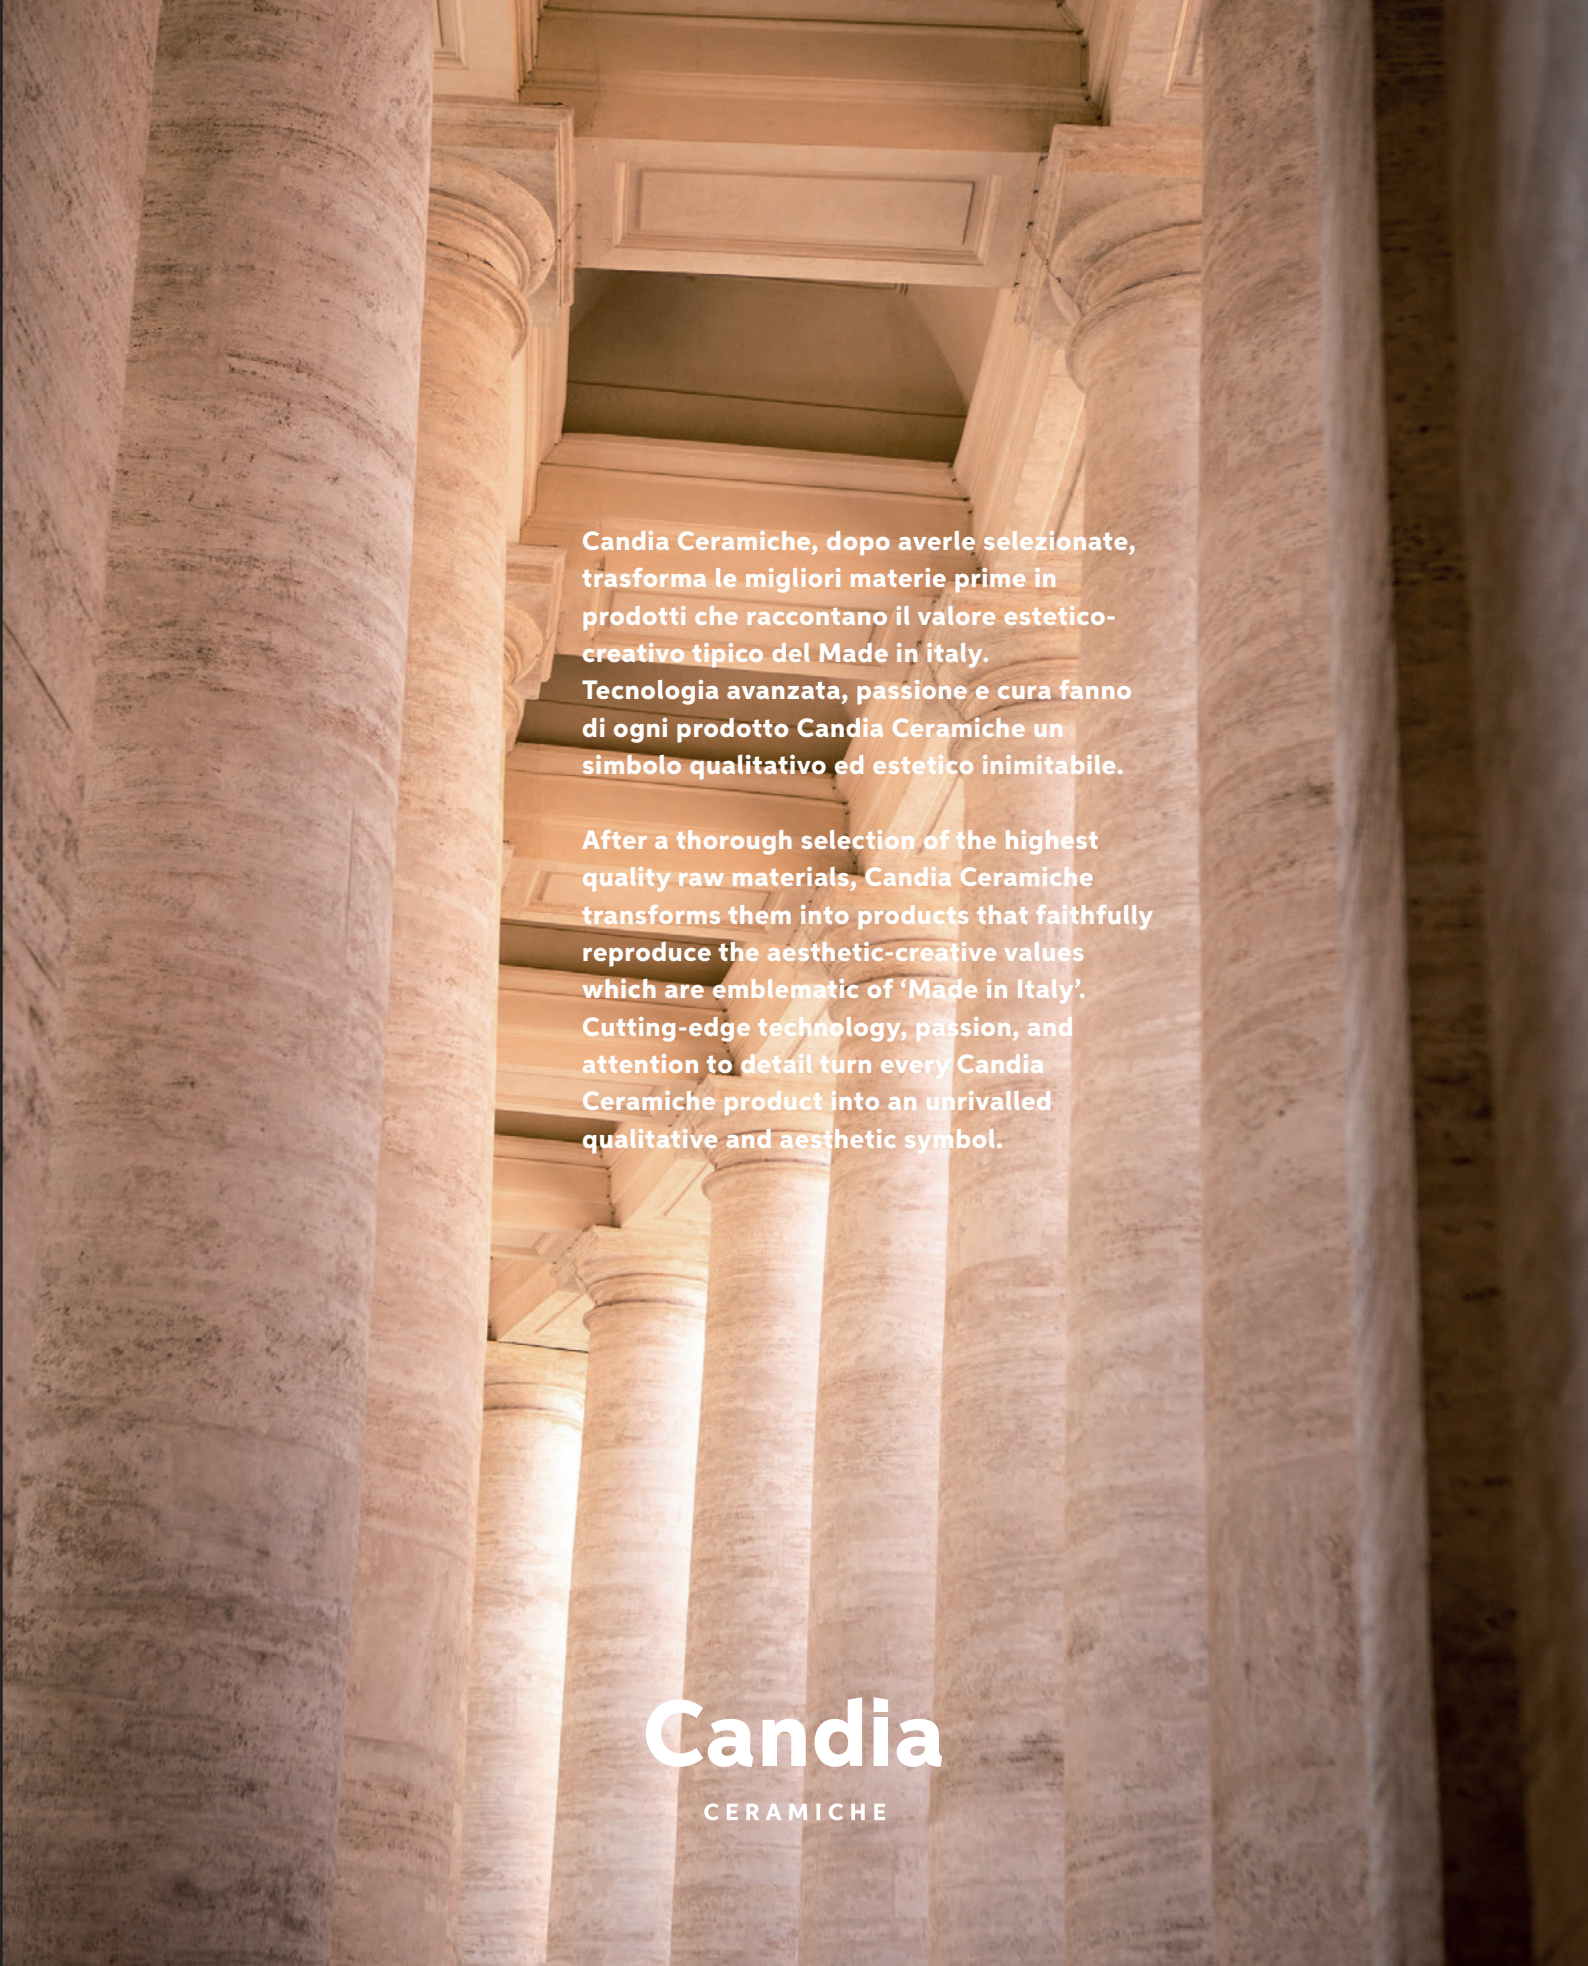

Candia Ceramiche, dopo averle selezionate, trasforma le migliori materie prime in prodotti che raccontano il valore estetico-creativo tipico del Made in Italy. Tecnologia avanzata, passione e cura fanno di ogni prodotto Candia Ceramiche un simbolo qualitativo ed estetico inimitabile.

After a thorough selection of the highest quality raw materials, Candia Ceramiche transforms them into products that faithfully reproduce the aesthetic-creative values which are emblematic of 'Made in Italy'. Cutting-edge technology, passion, and attention to detail turn every Candia Ceramiche product into an unrivalled qualitative and aesthetic symbol.

Candia
CERAMICHE


imperial

| FLOOR sovrana beige 60x120 levigato |







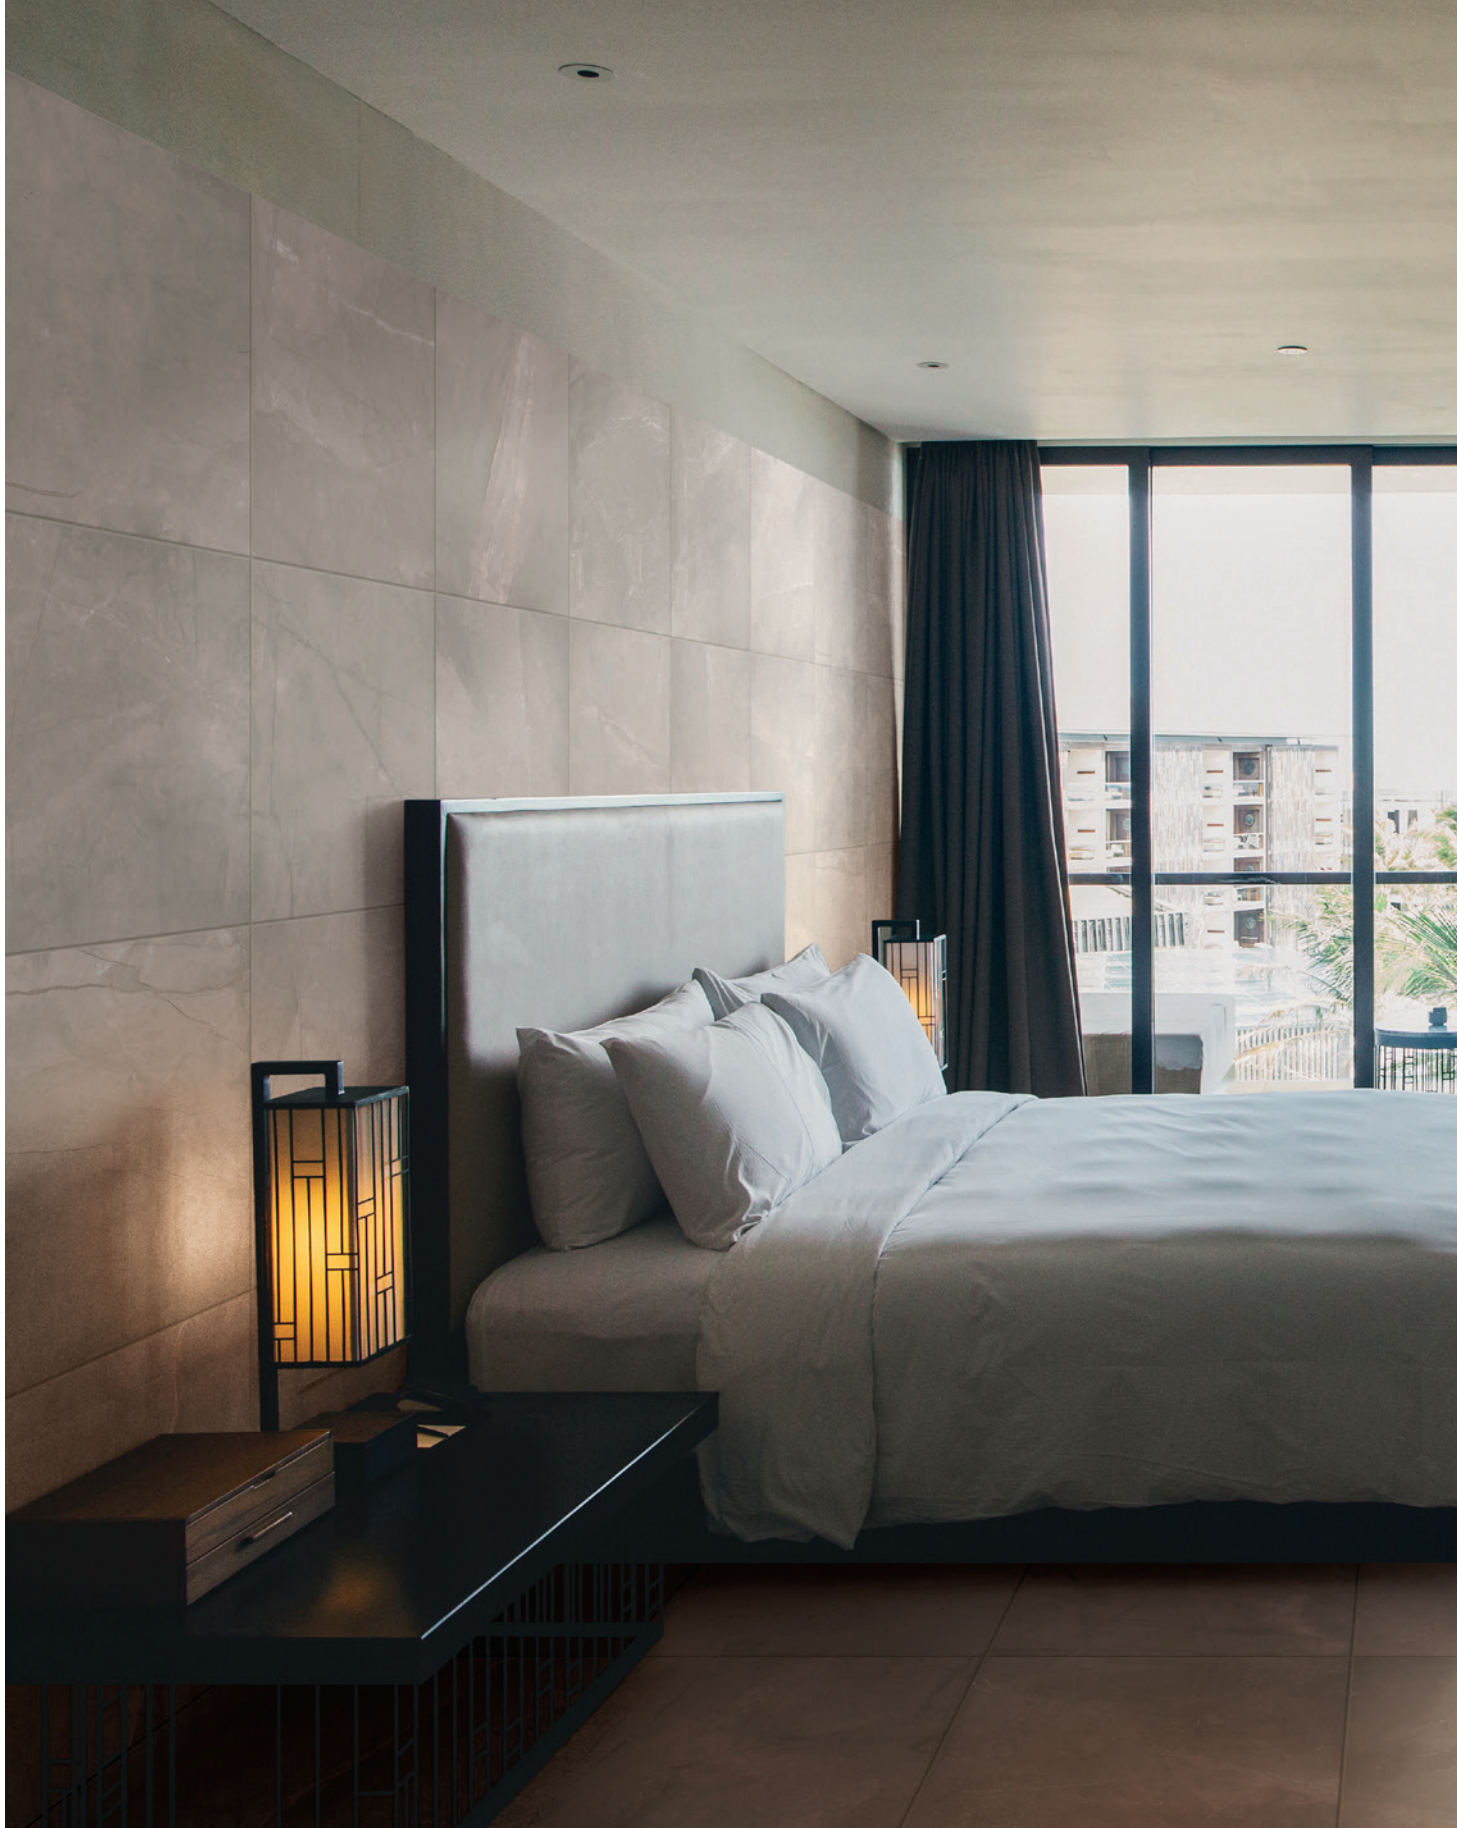



| FLOOR soveraira grey 60x60 satin | SHOWER calacatta 60x60 levigato | FURNITURE calacatta 60x120 levigato |



imperial








imperial

| statuario 60x120 - 26 facce |

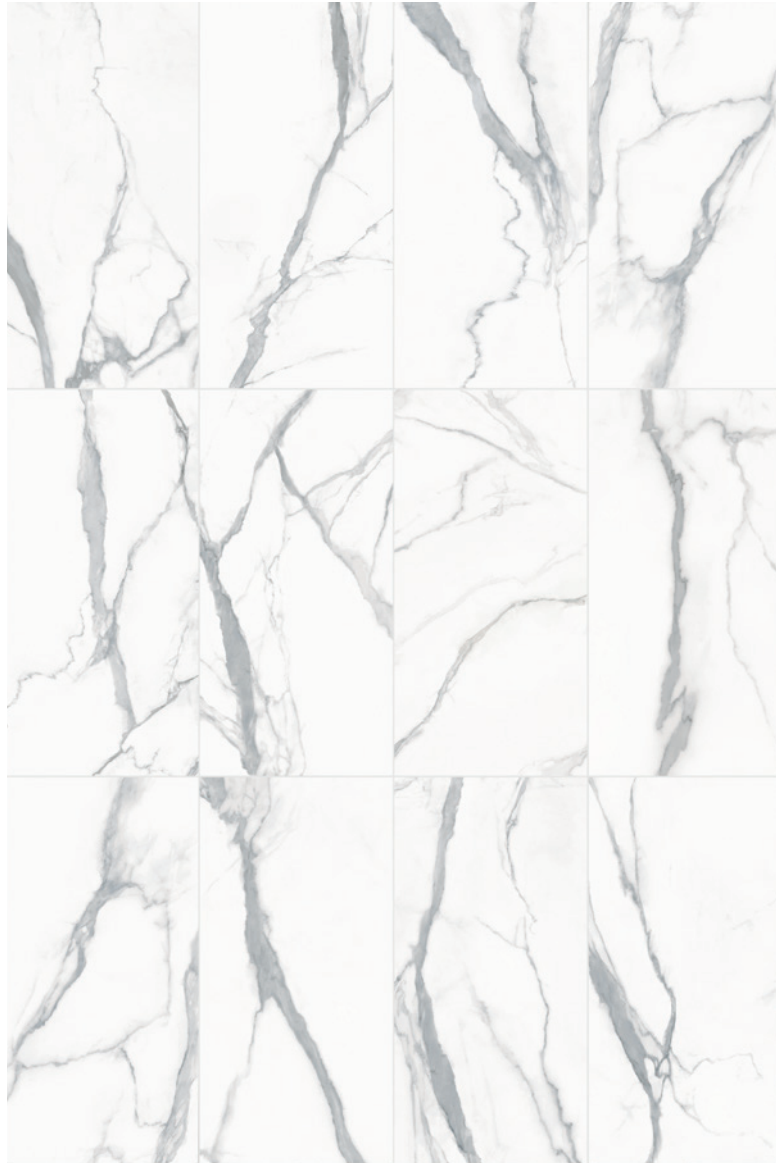

| calacatta 60x120 - 16 facce |



imperial

| sovrata silver 60x120 - 8 facce |



9 COLORI / COLORS


statuario



calacatta



pulpis ivoire

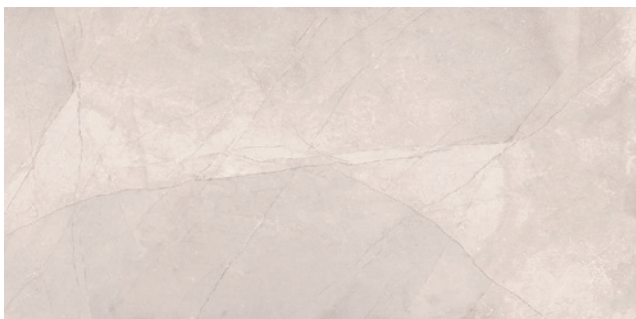


pulpis taupe



soveraia silver



soveraia grey

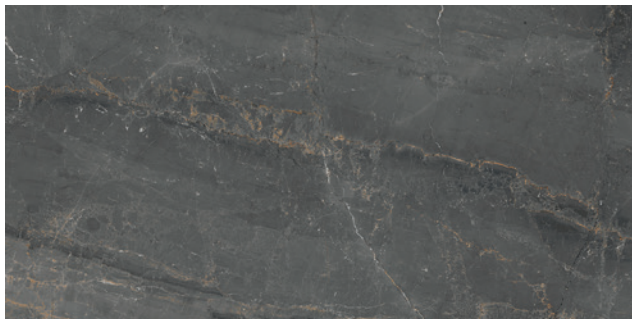

imperial


pulpis gris



soveraia beige




sahara noir

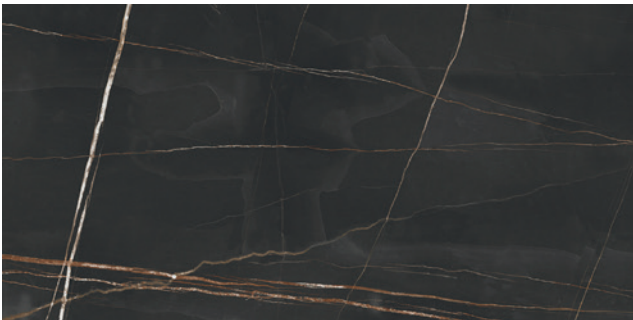

imperial

2 FORMATI / SIZES



60x60 - 24"x24" Rett.

finiture / finishes

LEVIGATO


93

SATIN

85

GRIP

85



60x120 - 24"x48" Rett.

finiture / finishes

LEVIGATO

93

SATIN

85

1 SPESSORE / THICKNESS

 **10** mm

2 PEZZI SPECIALI / TRIMS



GRADINO COSTARETTA

30x60 - 12"x24" Rett.

30x120 - 12"x48" Rett.



BATTISCOPA

7,5x60 - 3"x24" Rett. LEVIGATO

7,5x60 - 3"x24" Rett. SATIN

41

25

Resistenza allo scivolamento / slip resistance

SATIN **R10**

GRIP **R11 A+B+C**

CARATTERISTICHE TECNICHE / TECHNICAL FEATURES

INFORMAZIONI TECNICHE TECHNICAL FEATURES	NORME ISO ISO NORM	VALORE PRESCRITTO DALLE NORME VALUES REQUIRED BY THE NORMS	VALORI CANDIA VALUES CANDIA
 ASSORBIMENTO ACQUA % WATER ABSORPTION %	ISO 10545-3 ASTM C-373	≤0,5%	CONFORME CONFORMING
 RESISTENZA ALLA FLESSIONE BREAKING STRENGHT	ISO 10545-4 ASTM C-648	≥35 N/mm²	CONFORME CONFORMING
 RESISTENZA AL GELO FROST RESISTANCE	ISO 10545-12 ASTM C-1026	Richiesto Required	NON GELIVO FROST PROOF
 RESISTENZA ALL'ATTACCO CHIMICO CHEMICAL RESISTANCE	ISO 10545-13 ASTM C-650	Secondo la classificazione riportata dal fabbricante Metodo di prova disponibile GB min/min UB According to the classification stated by the manufacturer Testing method available GB min/min UB	CONFORME CONFORMING
 DUREZZA MOHS MOHS HARDNESS	UNI EN 101	≥5°	6
 RESISTENZA AGLI SBALZI TERMICI THERMAL SHOCK RESISTANCE	ISO 10545-9	Metodo di prova effettuabile Test method available	RESISTENTI RESISTANT
 RESISTENZA ALL'ABRASIONE PROFONDA RESISTANCE TO DEEP ABRASION	ISO 10545-6 ASTM C-501	≤175 mm³	CONFORME CONFORMING
 RESISTENZA ALL'ABRASIONE ABRASION RESISTANCE	ISO 10545-7	PEI	IV
 RESISTENZA ALLE MACCHIE STAIN RESISTANCE	ISO 10545-14	Classi ≥ 3	5
 COEFFICIENTE ATTRITO DINAMICO MEASUREMENT OF DINAMIC FRICTION COEFFICIENT	BOT 3000 Dynamic Coefficient of Friction D.C.O.F	> 0,40	CONFORME CONFORMING > 0,53

TABELLA IMBALLI / PACKAGING

FORMATO SIZE	SPESSORE THICKNESS	BOX			PALLET		
		PCS/BOX	MQ/BOX	KG/BOX	BOX/PALLET	MQ/PALLET	KG/PALLET
60x120 RTT	10mm	2	1,44	33,00	32	46,08	1056
60x60 RTT	10mm	3	1,08	23,50	32	34,56	752

This image shows a single sheet of white paper with horizontal ruling lines. The lines are evenly spaced and run across the width of the page. There are no margins, text, or other markings on the paper.

www.candiavalpanaro.it

Ceramica Candia


Via Bosco, 26

42019 Pratissolo di Scandiano (RE) Italy

Tel. +39 0522 1751703

Fax+39 0522 1751704

info@abm-italia.it



Ceramics of Italy

imperial

Candia
CERAMICHE

www.candiavalpanaro.it