

IN NATURE

Resistenza allo scivolamento / Slip resistance
R11

Spessore / Thickness
9 mm

Formati / Sizes
60x120 – 24"x48" Rett.

Finiture / Finishing
Mat





Certificate of Compliance

This is to certify that

ABM TECH S.A.

ATTIKI AVENUE EXIT NO 4, ASPROPYRGOS ATHENS

has been independently assessed by QVA and is compliant with the requirement of the standard

ISO 17721-1:2021

Quantitative determination of antibacterial activity of ceramic tile surfaces — Test methods — Part 1: Ceramic tile surfaces with incorporated antibacterial agents For the following scope of activities

CANDIA FASCINO ITALIANO, PORCELAIN TILES, CERAMIC TILES, MATT AND POLISHED

Certificate Number: QVA-ABGV45874

To verify this certificate please visit at www.gaafs.us

Date of Certification

21TH JUNE 2023

Issuance Date

21TH JUNE 2023

Re-Certificate Due

20TH JUNE 2024

Registered

Authorized Signatory



QVA Certification

CAB Address : Maryland Avenue, SW Washington, D.C. 20202

Validity of this certificate is subject to annual surveillance audits to be done successfully

This certificate is the property of QVA Certification and shall be returned immediately on request

QVA Certification is an independent Systems Products and Personal

assessment Body, QVA Certification is a accredited by GAAFS.US

  ΕΘΝΙΚΟ ΚΕΝΤΡΟ ΕΡΕΥΝΑΣ ΦΥΣΙΚΩΝ ΕΠΙΣΤΗΜΩΝ «ΔΗΜΟΚΡΙΤΟΣ» Τ.Θ. 60037 Τ.Κ. 15310 ΑΓΙΑ ΠΑΡΑΣΚΕΥΗ ΑΤΤΙΚΗΣ ΤΗΛ. 210-6503000-0000 FAX 210-6503005 www.demokritos.gr ΕΚΕΦΕ "ΔΗΜΟΚΡΙΤΟΣ" ΙΝΣΤ. ΠΥΡΗΝΙΚΩΝ & ΡΑΔΙΟΛΟΓΙΚΩΝ ΕΠΙΣΤΗΜΩΝ & ΤΕΧΝΟΛΟΓΙΑΣ, ΕΝΕΡΓΕΙΑΣ & ΑΣΦΑΛΕΙΑΣ (Ι.Π.Ρ.Ε.Τ.Ε.Α.) ΕΡΓΑΣΤΗΡΙΟ ΡΑΔΙΕΝΕΡΓΕΙΑΣ ΠΕΡΙΒΑΛΛΟΝΤΟΣ Τ.Θ.: 60037 - Τ.Κ.: 15310 - ΑΓΙΑ ΠΑΡΑΣΚΕΥΗ ΑΤΤΙΚΗΣ Τηλέφωνο: 210-6503005 FAX: 210-6503005 ΠΛΗΡΟΦΟΡΙΕΣ: Κ.ΕΛΕΥΘΕΡΙΑΔΗΣ / Β.ΒΑΣΙΛΑΤΟΥ www: http://www.ipretec.demokritos.gr http://www.ipra.demokritos.gr/eri/eri.html email: elefther@ipta.demokritos.gr, contact-eri@ipta.demokritos.gr	 ΔΟΚΙΜΕΣ Αρ.Πιστοποιητικού 447	Αγία Παρασκευή 24 Φεβ 2023 Α.Π. 260/0/ 2305
	ΠΡΟΣ: ΑΒΜ ΤΕΧΝΟΛΟΓΙΚΗ ΑΕ ΕΞΟΔΟΣ 4 ΑΣΠΡΟΠΥΡΓΟΣ Τ.Κ.:19300 ΤΗΛ: 2105596230 ΚΟΙΝ:	
Σχετικό σορ: Σχετικό μας: 140/2023-457/10-02-2023		

ΠΙΣΤΟΠΟΙΗΤΙΚΟ ΜΕΤΡΗΣΗΣ ΡΑΔΙΕΝΕΡΓΕΙΑΣ ΔΕΙΓΜΑΤΩΝ

Ημερομηνία Δειγματοληψίας:	10 Φεβ 2023	Ημερομηνία Μέτρησης:	13/02/2023 και 21/02/2023
Προέλευση:	ΕΛΛΑΔΑ		
Προορισμός:			

ΠΕΡΙΓΡΑΦΗ ΔΕΙΓΜΑΤΩΝ

A.A ΕΚΕΦΕ "Δ"	Είδος Δείγματος κατά δήλωση της "ΑΒΜ ΤΕΧΝΟΛΟΓΙΚΗΣ Α.Ε."
233005	Πλάκα Candia
	Δείκτης συγκέντρωσης ενεργότητας: $I = C(Ra226)/300 + C(Th232)/200 + C(K40)/3000 < 0,89 \text{ Bq/kg}$
	$C(U238) = 31 \pm 19 \text{ Bq/kg}$, $C(Ra226) = 59,8 \pm 1,5 \text{ Bq/kg}$, $C(Th232) = 83,4 \pm 2,0 \text{ Bq/kg}$
	$C(K40) = 521 \pm 14 \text{ Bq/kg}$
	$Cs137 < 0,1 \text{ Bq/kg}$
	Κάτοχος δείγματος: ΑΒΜ ΤΕΧΝΟΛΟΓΙΚΗ Α.Ε.
Το δείγμα κρίνεται κατάλληλο για κατανάλωση από πλευράς ραδιενέργειας	
ΠΑΡΑΤΗΡΗΣΕΙΣ: Το δείγμα κρίνεται κατάλληλο για εμπορική, βιομηχανική και κατασκευαστική χρήση σύμφωνα με το Προεδρικό Διάταγμα υπ' αριθμόν 101 (Φ.Ε.Κ. Α' 194/20-11-2018) περί προσαρμογής της ελληνικής νομοθεσίας στην Οδηγία 2013/59/Ευρατομ του Συμβουλίου, της 5ης Δεκεμβρίου 2013 (ΕΕ L13/17.1.2014), για τον καθορισμό βασικών προτύπων ασφαλείας για την προστασία από τους κινδύνους που προκύπτουν από τις ιοντίζουσες ακτινοβολίες - Θεώρηση Κανονισμών Ακτινοπροστασίας. Δεν ανιχνεύθηκαν τεχνητά ισότοπα στο δείγμα.	


 Ο Αρμόδιος
 Δρ Κ.ΕΛΕΥΘΕΡΙΑΔΗΣ


Candia's groundbreaking innovation:

- **Unrestricted utility**
- **Seamlessly integrates into any natural architectural design.**
- **Combination with other range of Candia products, it elevates aesthetics to a whole new level, providing a blend of beauty.**
- **With the advantages of artificial granite, it gives a touch of nature to your spaces.**
- **Armed with antibacterial protection, ensuring a clean and healthy environment.**
- **Anti-slip feature provides an extra layer of safety.**
- **Maintenance-free brilliance, allowing you to enjoy its appearance without any hassle.**
- **No matter the weather, it withstands wear and tear effortlessly, ensuring longevity and enduring beauty.**

Outdoor solution



Indoor solution

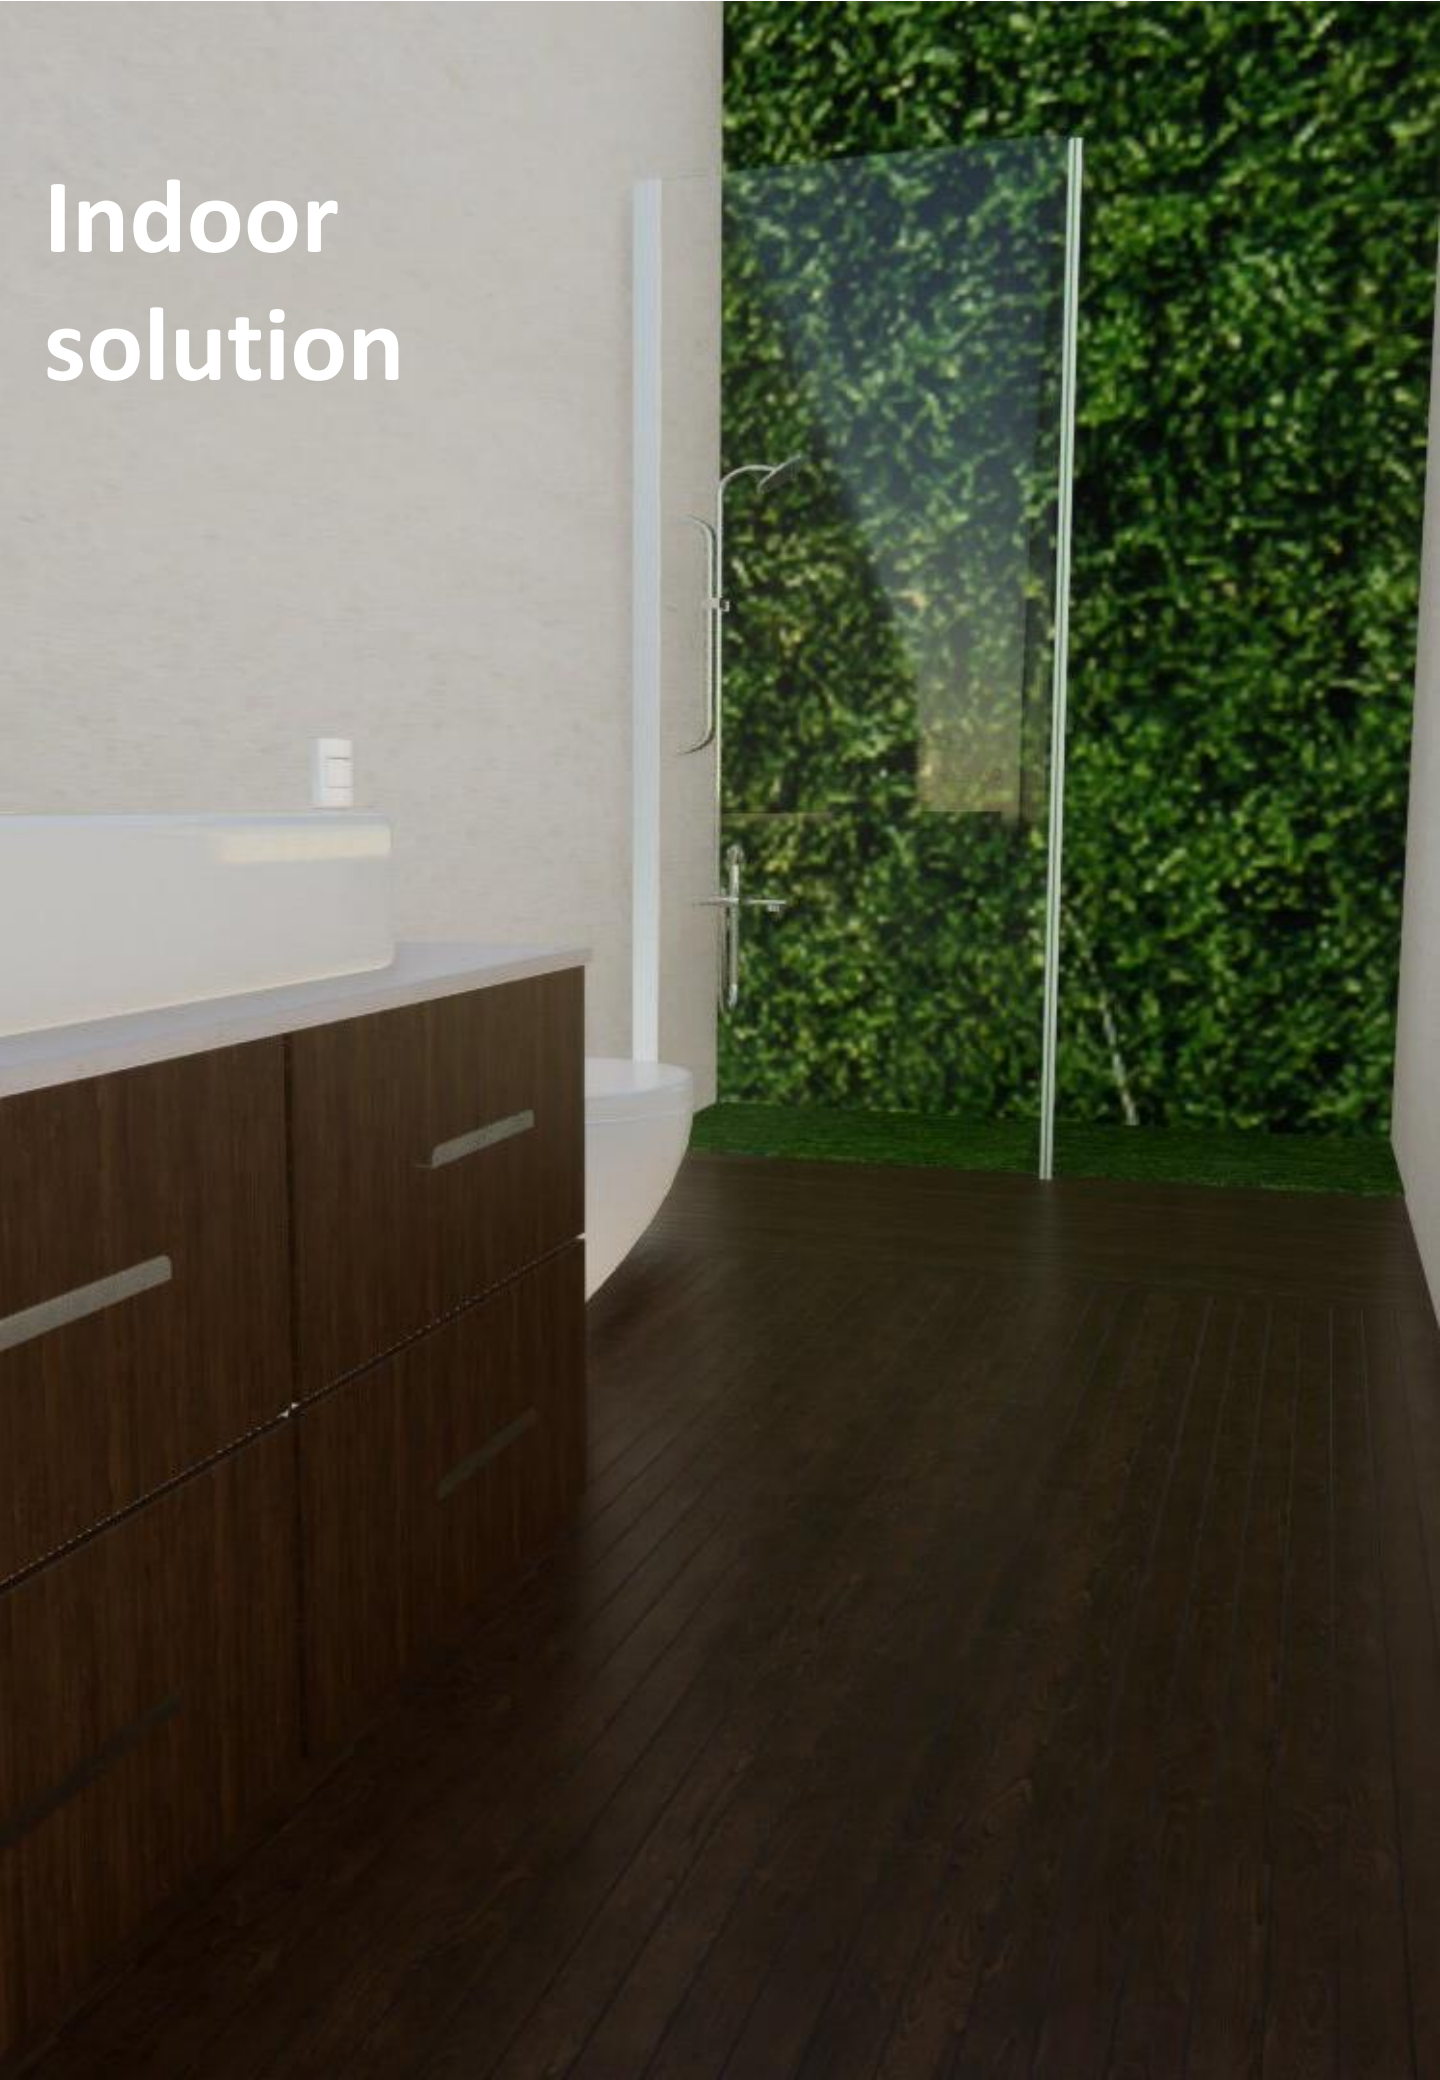

IN NATURE

1 formati / sizes

1 spessore / thickness

9 mm



60x120 - 24"x48" rett.

Mat

Resistenza allo scivolamento / slip resistance **R11**

Grout color:

Black no. 2




combinations

60x120
In Nature
Mat



60x60
Mosaic Marble
Mat

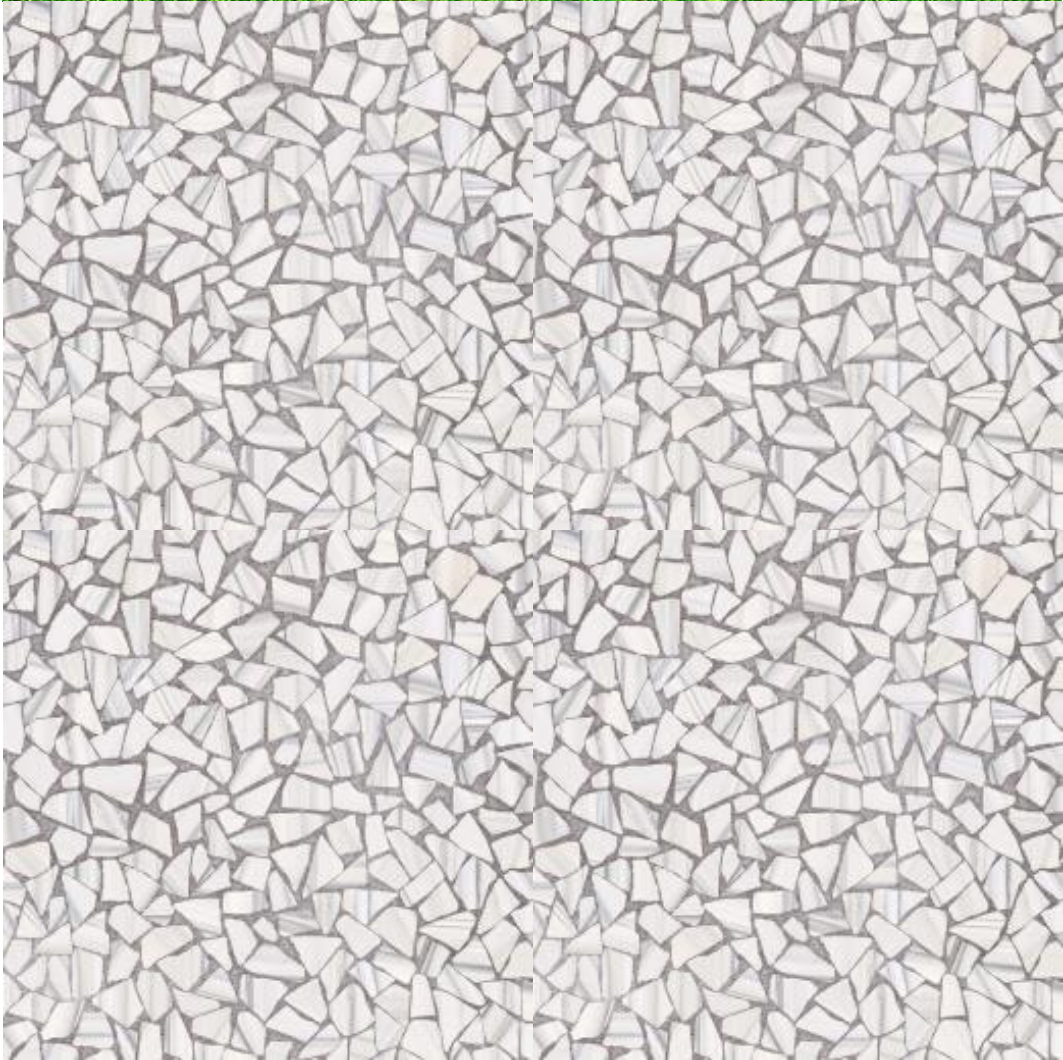

combinations



60x120
In Nature
Mat

60x60
Cotto
Mat





60x120
In Nature
Mat




60x120
Olympos Stone
Mat




60x120
Stone Age Light
Mat



60x120
Stone Age
Mat

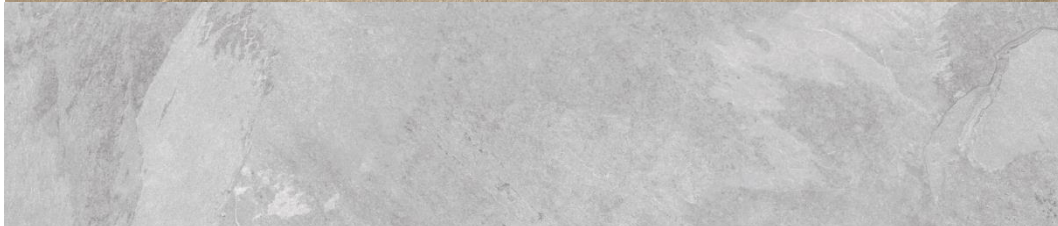

60x120
Brazilian Stone
Light
Mat

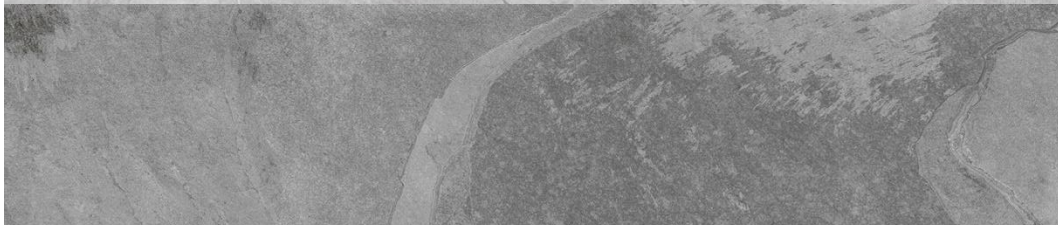

60x120
Brazilian Stone
Grey
Mat

combinations



60x120.
In Nature
Mat



20x120 Ecwood White Mat	20x120 Ecwood Light Mat	20x120 Ecwood Grigio Mat	20x120 Ecwood Nogal Mat	20x120 Ecwood Honey Mat
----------------------------------	----------------------------------	-----------------------------------	----------------------------------	----------------------------------



20x120 Ecwood Cherry Mat	20x120 Ecwood Wenge Mat	20x120 Ecwood Minimal Mat	20x120 Ecwood Black Mat
-----------------------------------	----------------------------------	------------------------------------	----------------------------------

CARATTERISTICHE TECNICHE/ TECHNICAL FEATURES

INFORMAZIONI TECNICHE TECHNICAL FEATURES	NORME ISO ISO NORM	VALORE PRESCRITTO DALLE NORME INTERNATIONAL STD ISO 13006/EN 176 GROUP Bla	VALORI CANDIA VALUES CANDIA
---	-----------------------	---	--------------------------------

DIMENSION & SURFACE QUALITY

Deviation In Length	ISO-10545-2	±0.6%	±0.2%
Deviation in Thickness	ISO-10545-2	±5%	±3%
Straightness of Sides	ISO-10545-2	±0.5%	±0.2%
Rectangularity	ISO-10545-2	±0.6%	±0.2%
Surface Flatness	ISO-10545-2	±0.5%	±0.2%

PHYSICAL & THERMAL PROPERTIES

Water Absorption	ISO-10545-3	<0.50%	<0.40%
Mohs Hardness	EN-101	Min.5	Min.5
Flexural Strength	ISO-10545-4	>35 N/mm2	>40N/mm2
Slip Resistance (Friction Coefficient)	ISO-10545-17	>0.4	4
Breaking Strength	ISO-10545-11	>1113 N	>1800N
Frost Resistance	ISO-10545-12	Frost Proof	Frost Proof
Thermal Shock Resistance	ISO-10545-9	No Damage	No Damage
Moisture Expansion	ISO-10545-10	NIL	NIL
Resistance to Surface Abrasion	ISO-10545-7	Abrasion class shall be specified by the manufacturer	PEI IV & V

CHEMICAL PROPERTIES

Chemical Resistance	ISO-10545-13	No Damage	No Damage
Color Resistance	ISO-10545-16	No Damage	No Damage
Stain Resistance	ISO-10545-14	Resistant	Resistant

TABELLA IMBALI/ PACKAGING

		BOX			PALLET		
	SPESSORE THICKNESS	PCS/BOX	MQ/BOX	KG/BOX	BOX/PALLET	MQ/PALLET	KG/PALLET
60x120 RTT	9mm	2	1.44	27,6	34	48,92	938,4

note / notes

[illegible]

note / notes

[illegible]

note / notes

[illegible]

Candia[®]

Fascino Italiano

Organization
&
High Tech RND

info@abmcosmos.com
www.abmcosmos.com